
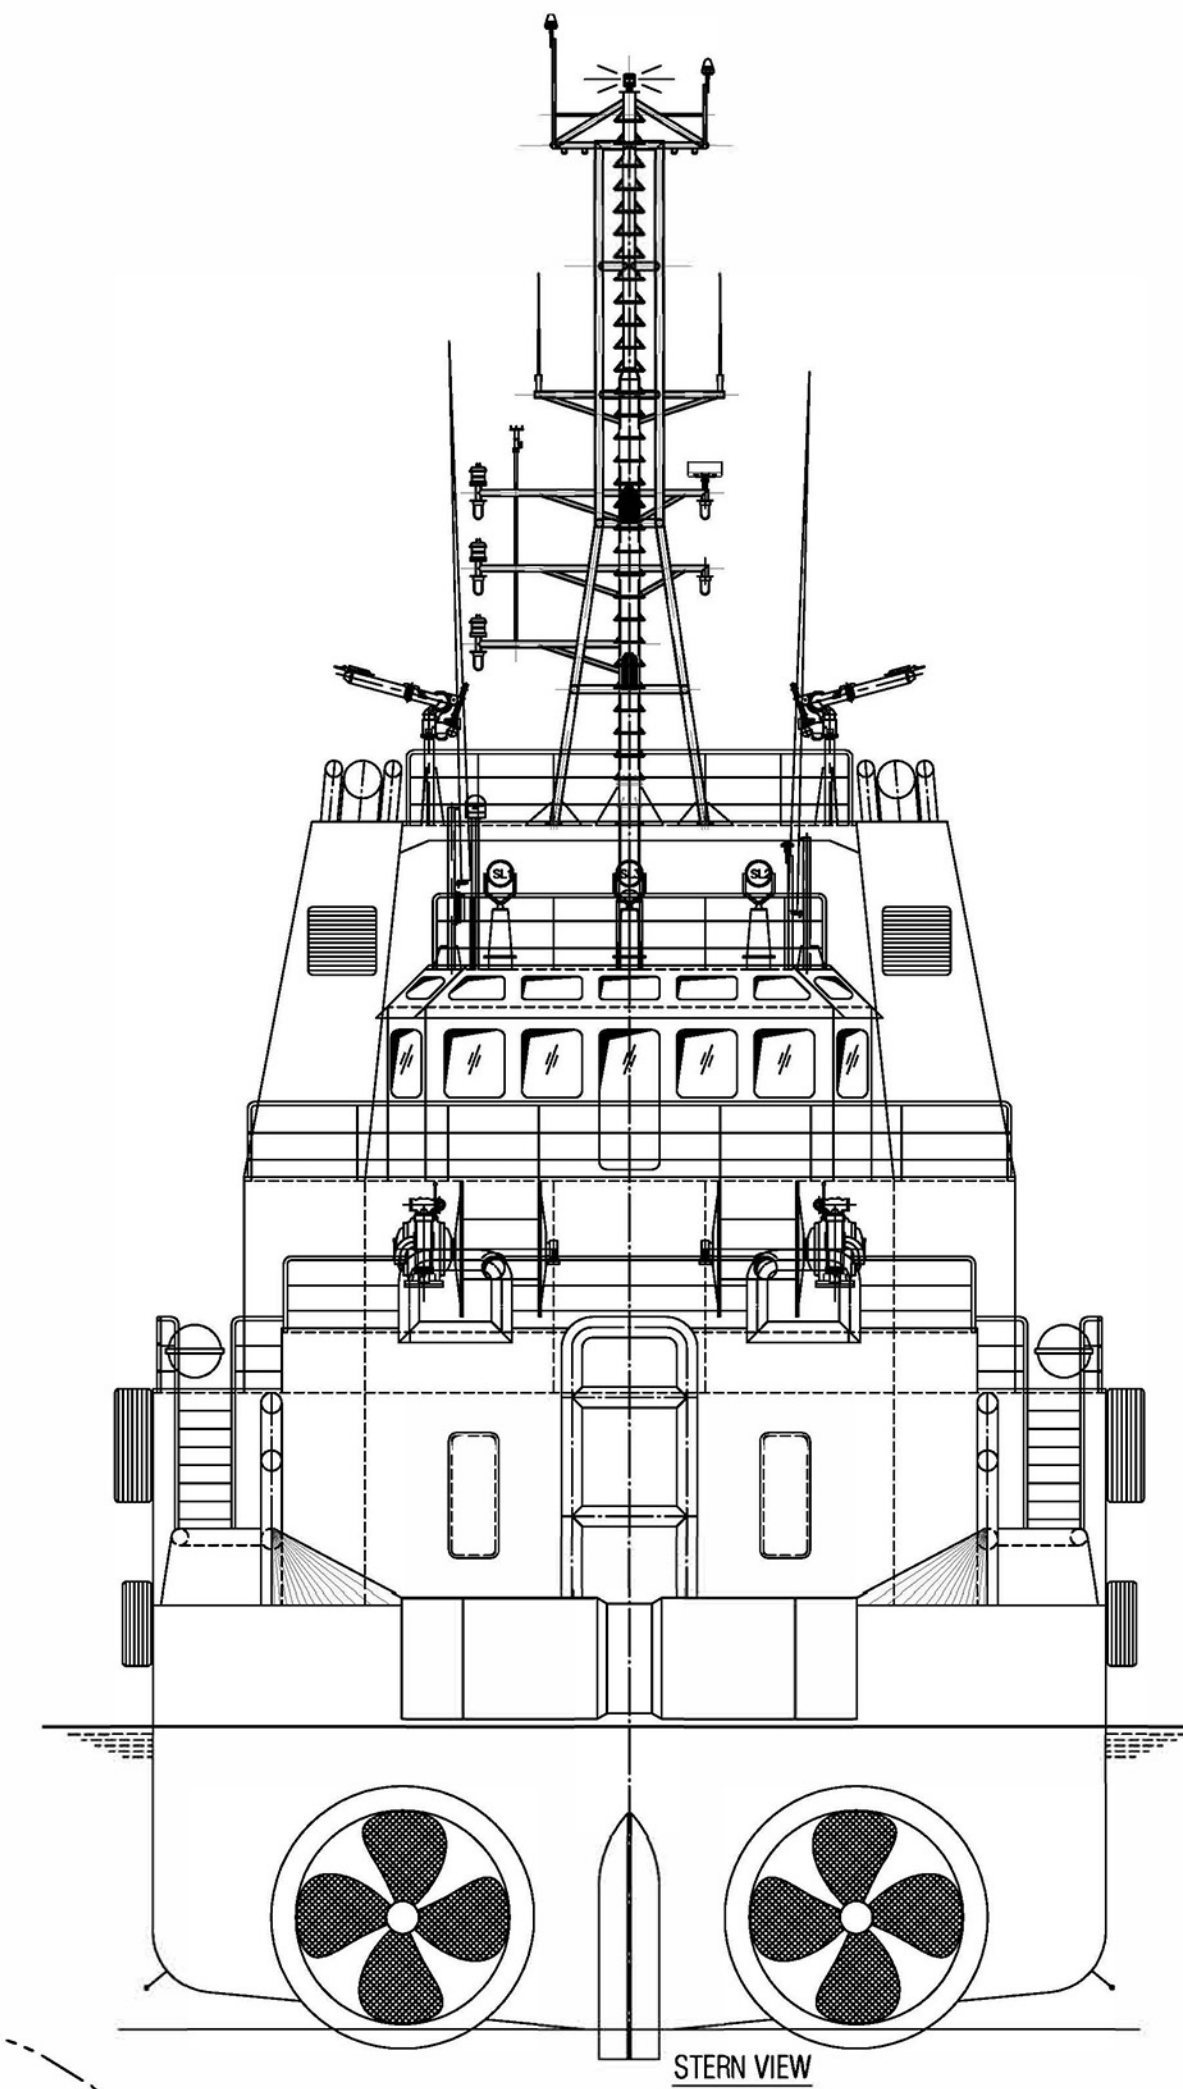


ORIENT NO.7

DONG FANG OFFSHORE CO., LTD.





VESSEL INFORMATION	
Registry	ROC
Year of Delivery	2009
Classification	CR + A1, Towing Vessel, (E), + AMS / ABS
Type	Ocean Going/Anchor Handling/ Towing Tug
PRINCIPAL PARTICULARS	
Dimensions	43m x 12.6m x 5.6m
GRT / NRT / DWT	816T / 245T / 655T
Deck Strength	5.0 mt/m²
MIN Working Draft	4.3m
Fuel (90%)	476 mt
FW	80 mt
FW Maker	12.4 mt/day
SWL	300 mt
Main Deck Space	18m x 8.9m
Endurance	7,200 nautical miles @ 12 knots
SPEED	
Speed	12 knots
BOLLARD PULL	
Bollard Pull	52T
ACCOMMODATION	
Accommodation	Fully air-conditioned for 24 men
LIFE SAVING EQUIPMENT	
Lifesaving	Comply with SOLAS requirements
Liferafts	2 x 25 men
Rescue Boat	1 x 6 men
FIRE-FIGHTING & ANTI-POLLUTION EQUIPMENT	
Firefighting	Comply with SOLAS requirements
Fire Monitors	2 fixed foam/water fire monitors of 3000 litres/min each @ 120m head capacity. 1 x Fire pump of 360m/hr
PROPULSION SYSTEM	
Main Engines	2 x Yanmar 8N21A-EV diesel engines producing 1800 bhp each @ 900 rpm c/w 2 x Reintjes WAF 1563L gearboxes, ratio 4.846:1
Main Engines Consumption	11,000 litres MGO and 36 litres lube oil per 24 hours @ full power. 7,200 litres MGO and 16 litres lube oil per 24 hours @ economic cruising speed of 10 knots
Propulsion	2 x fixed propellers 2800mm diameter, Aluminum Nickel in kort nozzles
Bow Thruster	Brunvoll FU-45-LTC-1375, 380kW, 6.2T thrust
Steering Gear	Electro hydraulic, 7T torque

GENERATORS	
Generators	3 x 400kW, 380V/3/50Hz, Caterpillar model 3412DITA diesel driven, Emergency Generators CAT 3056 124HP/92.5KW
Generator Consumption	580 litres MGO and 13 litres lube oil per 24 hours
TANK CAPACITIES	
Fuel Oil Purifier	Mitsubishi self cleaning fuel oil purifier SJ-700
Lube Oil Purifier	Mitsubishi self cleaning lube oil purifier SJ-10G
TOWING & ANCHOR HANDLING EQUIPMENT	
Towing / Anchor winch	BRATTVAAG double drum waterfall type SL75-2T hydraulic winch with remote controls in wheelhouse 75T pull @ 14m/min 43T pull @ 22m/min Wire Capacity :- 1000m x 52mm diameter Brake holding : 140T
Towing pins & Shark jaws	Karmfork combination – 1 set towing pins & 2x shark jaws
Stern Roller (Size)	L-4.39m; Dia-1.67m
Wire Storage Reels	1 x 9.2T line pull @ 0-26 m/min, storage reels will contain 1000M x 52mm dia
DECK MACHINERY	
Anchors	2 x 2100kg stockless anchors
Tugger Winch	2 x BRATTVAAG 9.5T line pull @ 0-36m/min
Crane	North American Crane model MCT2-2568, MOD – 2.6T @ 20.7m
Anchor Windlass	Hydraulic 7.7T @ 0-14m/min BRATTVAAG
Anchor Chain	2 x 385m x 36mm diameter U3 steel stud link chain
Dispersant Booms	2 sets spray nozzles, type UOC 600, 1 (M) x 1 (F), brass, duty 276 liters @ 4.14 bar.
Fendering	Flat bar doubler plates of 400mm x 25mm cross section welded to side shell
NAVIGATIONAL AND COMMUNICATION EQUIPMENT	
GMDSS Radio Console	FURUNO model RC-1800T-25, A1-2-3 radio package. 24VDC/220VAC with manual c/over to emergency supply, to meet GMDSS requirement. Complete with: -1x HF/MF SSB radiotelephone, FURUNO model FS-2570 (250W); -2x INMARSAT C terminal, FURUNO model FELCOM-15
VHF	2 x VHF/DSC marine radio telephones. FURUNO model FM-8500 (25W)
Radar	2 x radar. Model FAR-2117
Gyro & Automatic Pilot	1 x Gyro, SIMRAD model RGC 80; 1 x Autopilot, Anschuetz model NP 60.
Other Navigation and Communication Equipment	EPIRB, Radar Transponders, Navtex Receiver, GPS Navigator, Anemometer, Echo Sounder, Speed log, AIS, SSAS, Globalmap 9200C GPS Chart Plotter, Omni-Direction TV System, P.A. System, Common Battery Powered Telephone, Inmarsat F, ICOM VHF Radiotelephones

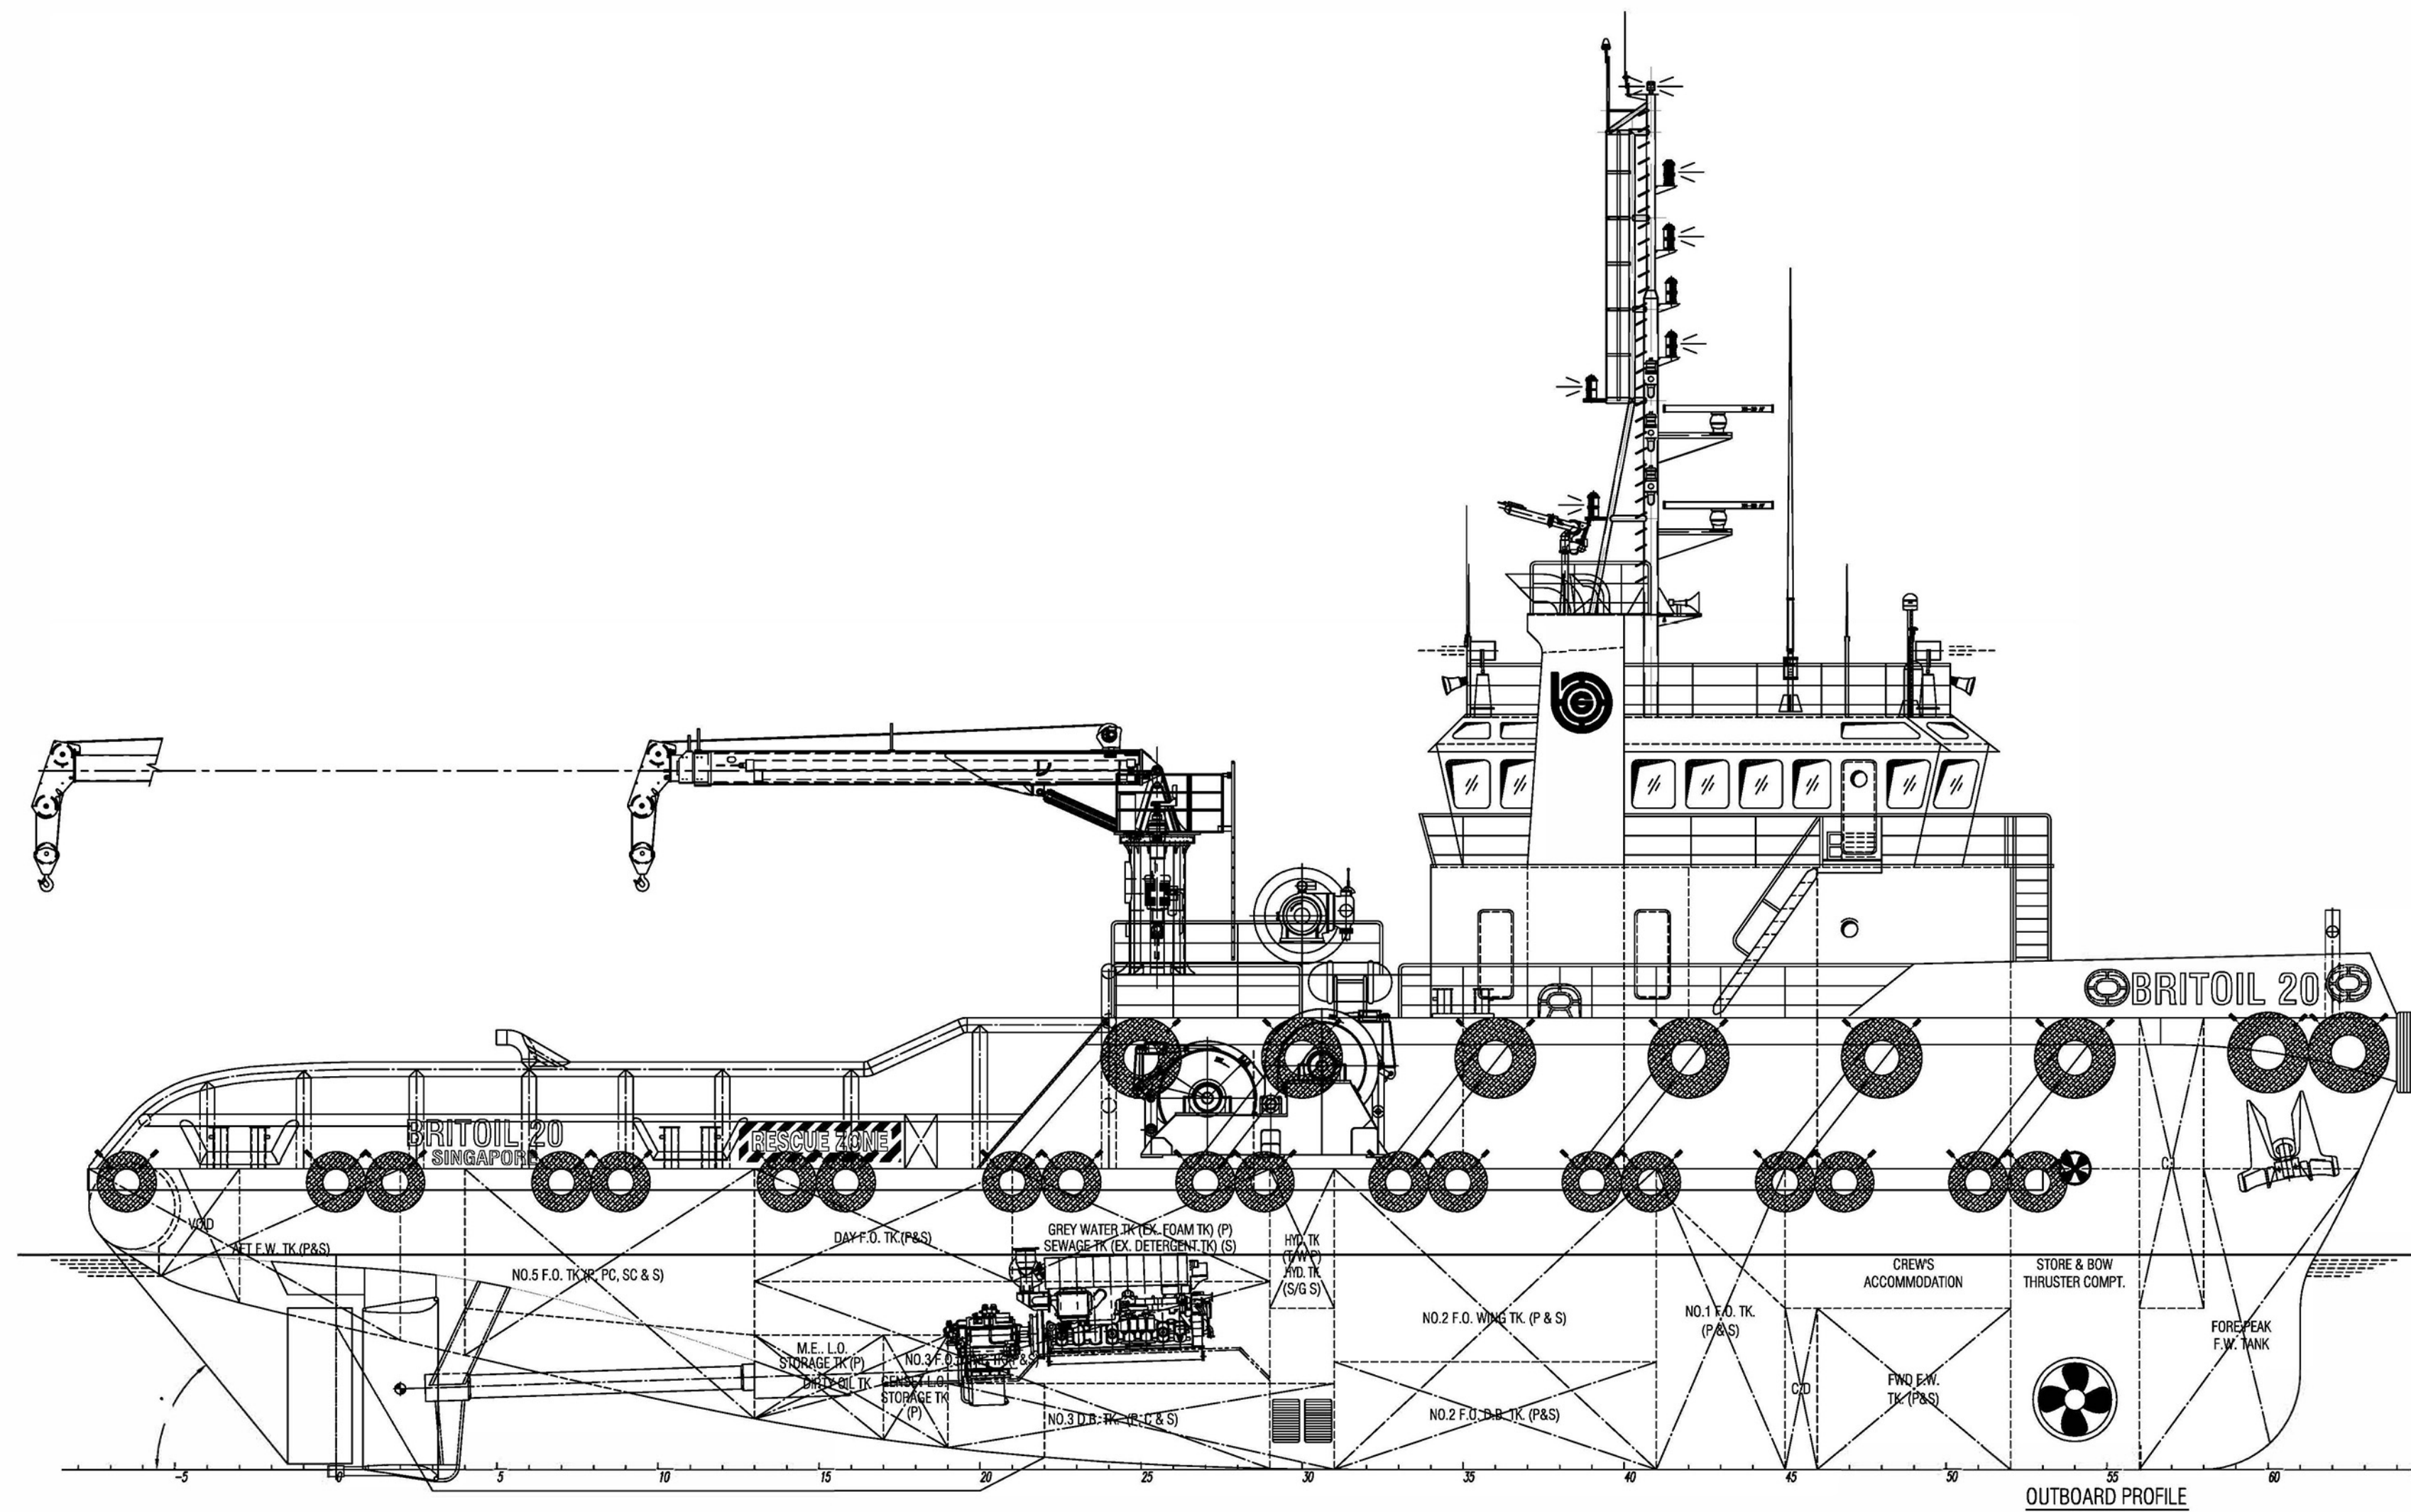

PRINCIPAL PARTICULARS

LENGTH O.A.	43.00 m
LENGTH W.L.	40.20 m
LENGTH B.P.	36.90 m
BEAM MLD.	12.60 m
DEPTH MLD.	5.60 m
DRAFT DESIGNED	4.00 m
FRESH WATER	130 m ³ (approx.)
FUEL OIL	500 m ³ (approx.)
M/E LUB OIL	8.5 m ³ (approx.)
GENERATOR LUB OIL	5.3 m ³ (approx.)
DECK MACHINERY HYDR. OIL	3.1 m ³ (approx.)
STEERING GEAR HYDR. OIL	3.1 m ³ (approx.)
DIRTY OIL	14.0 m ³ (approx.)
DETERGENT	10.0 m ³ (approx.)
FOAM	10.0 m ³ (approx.)
COMPLEMENT	24 MEN
GRT	tons

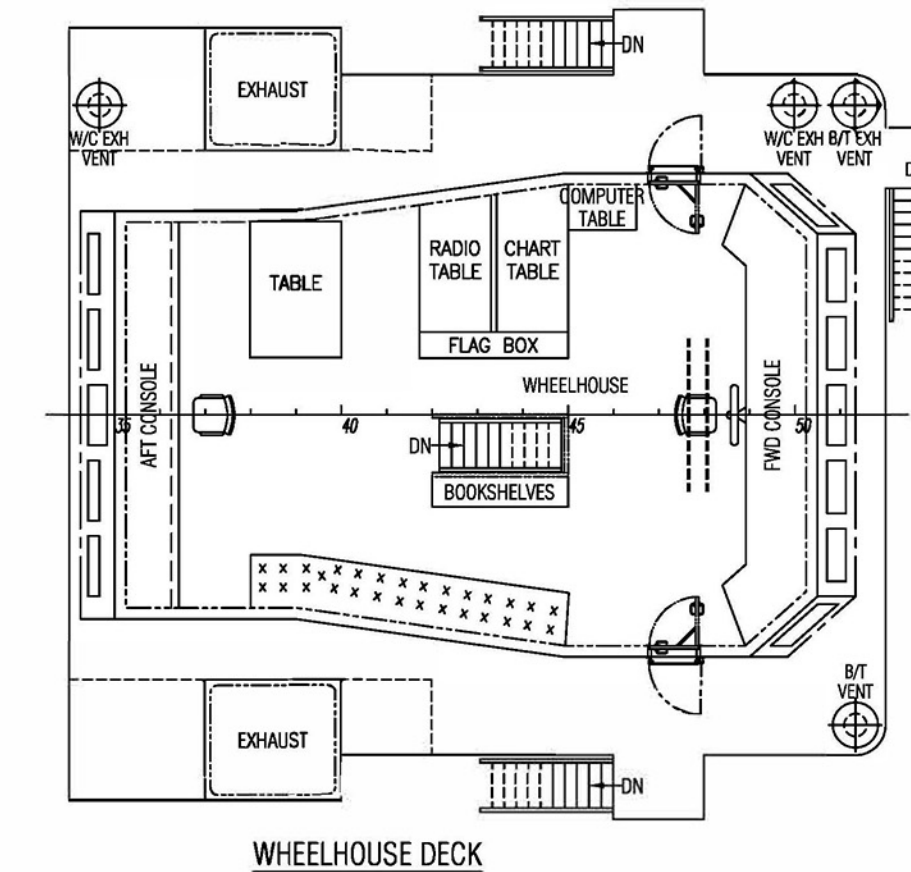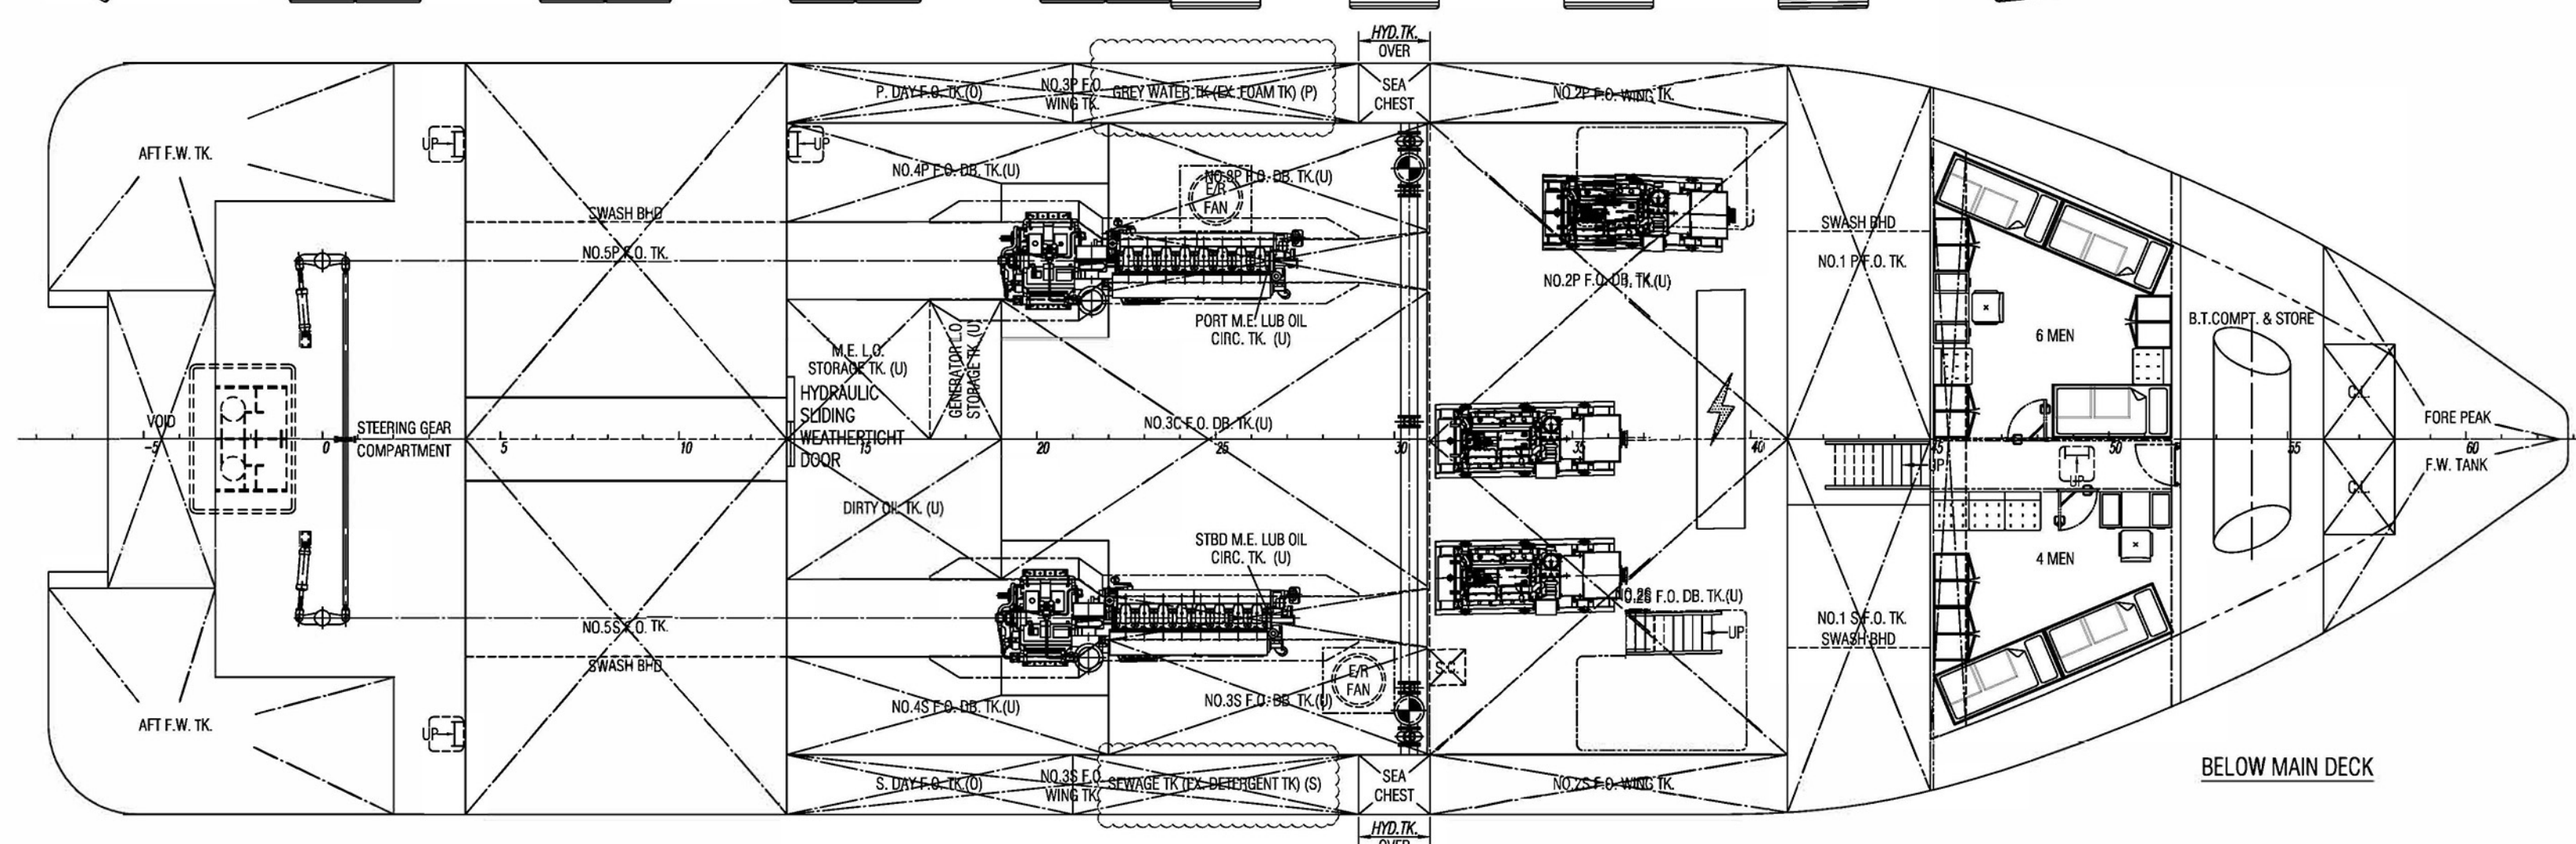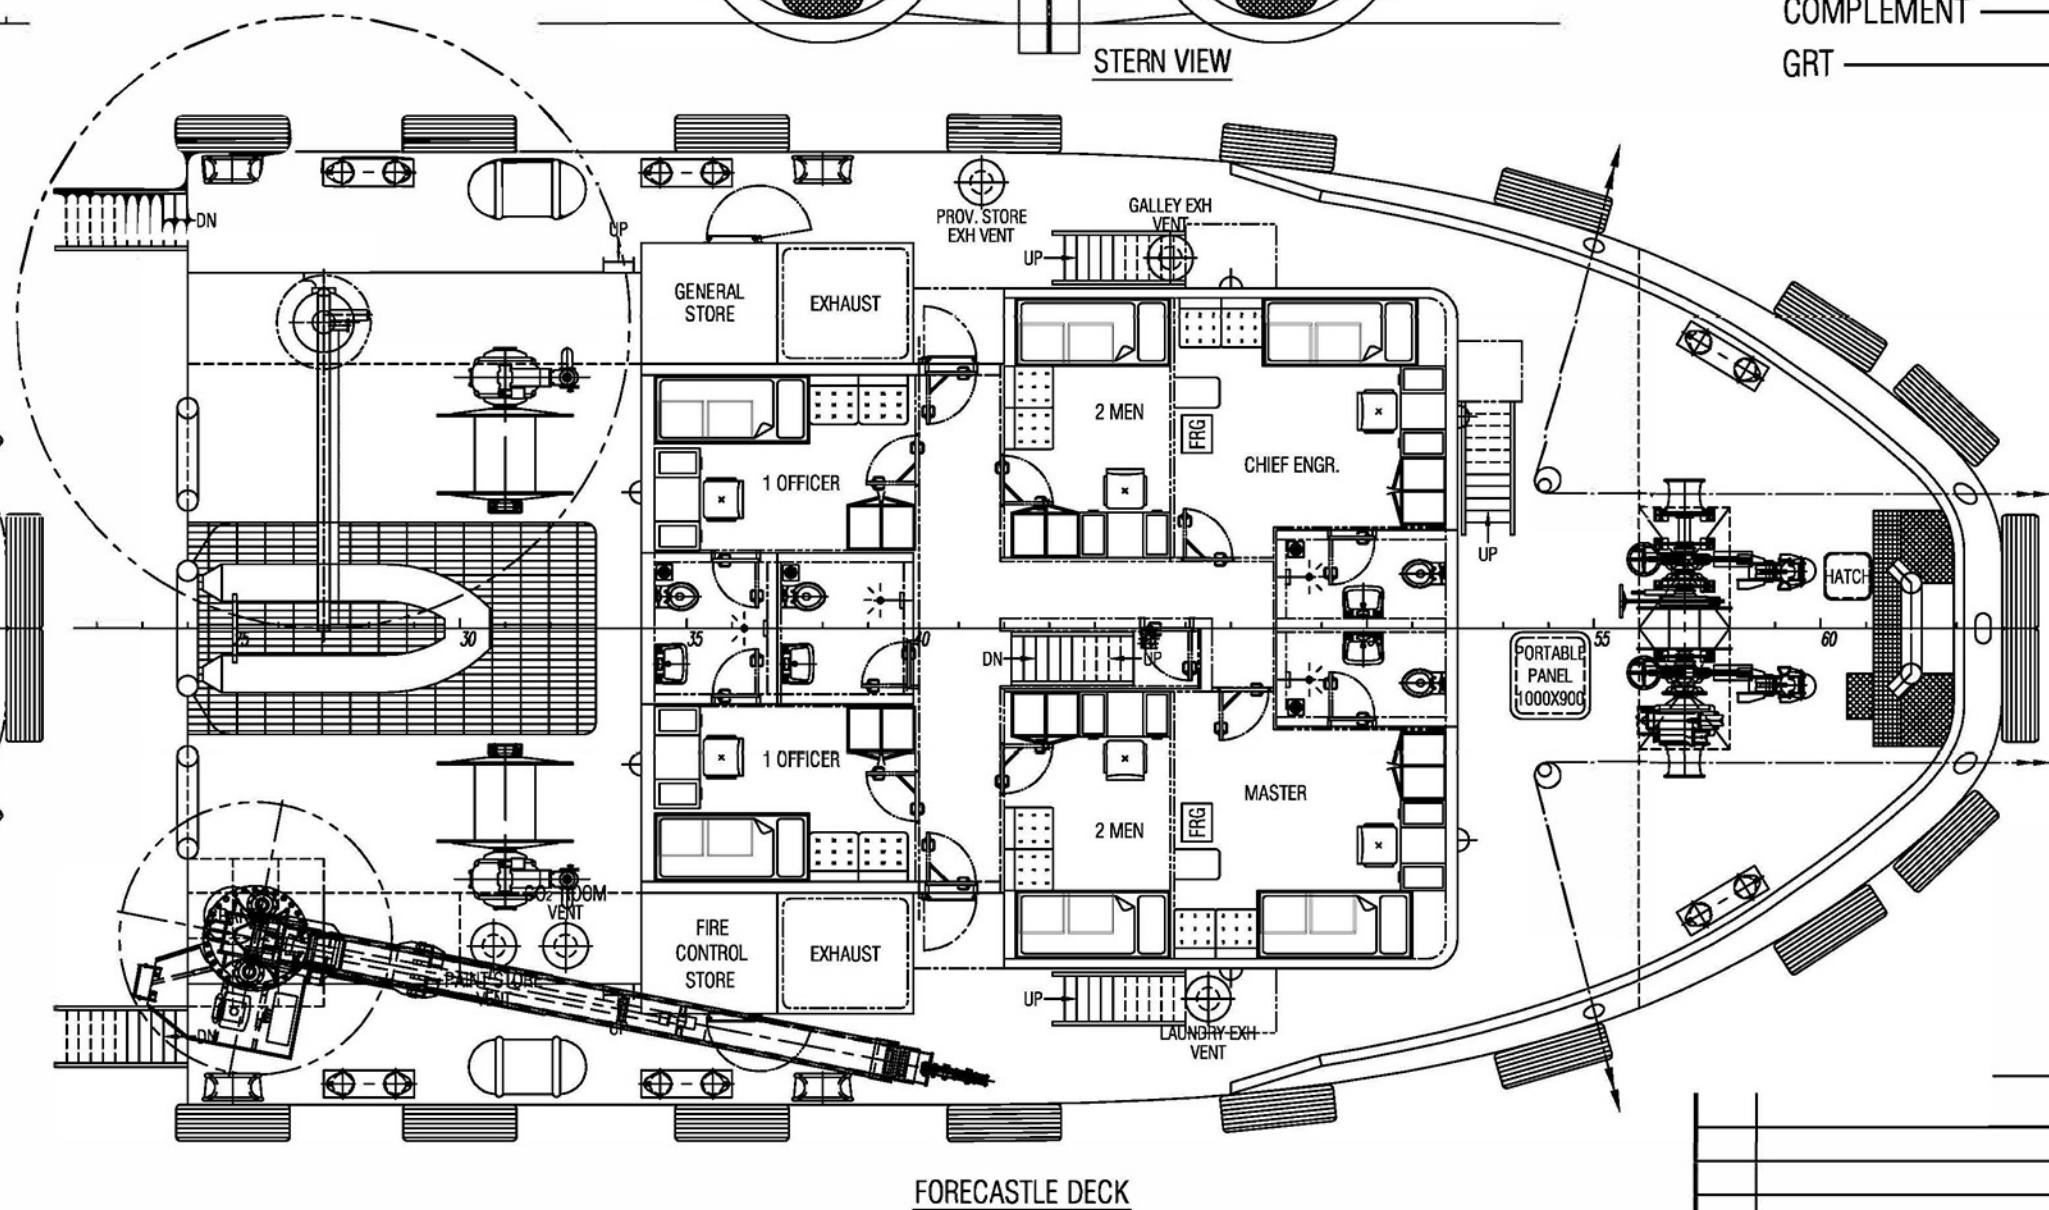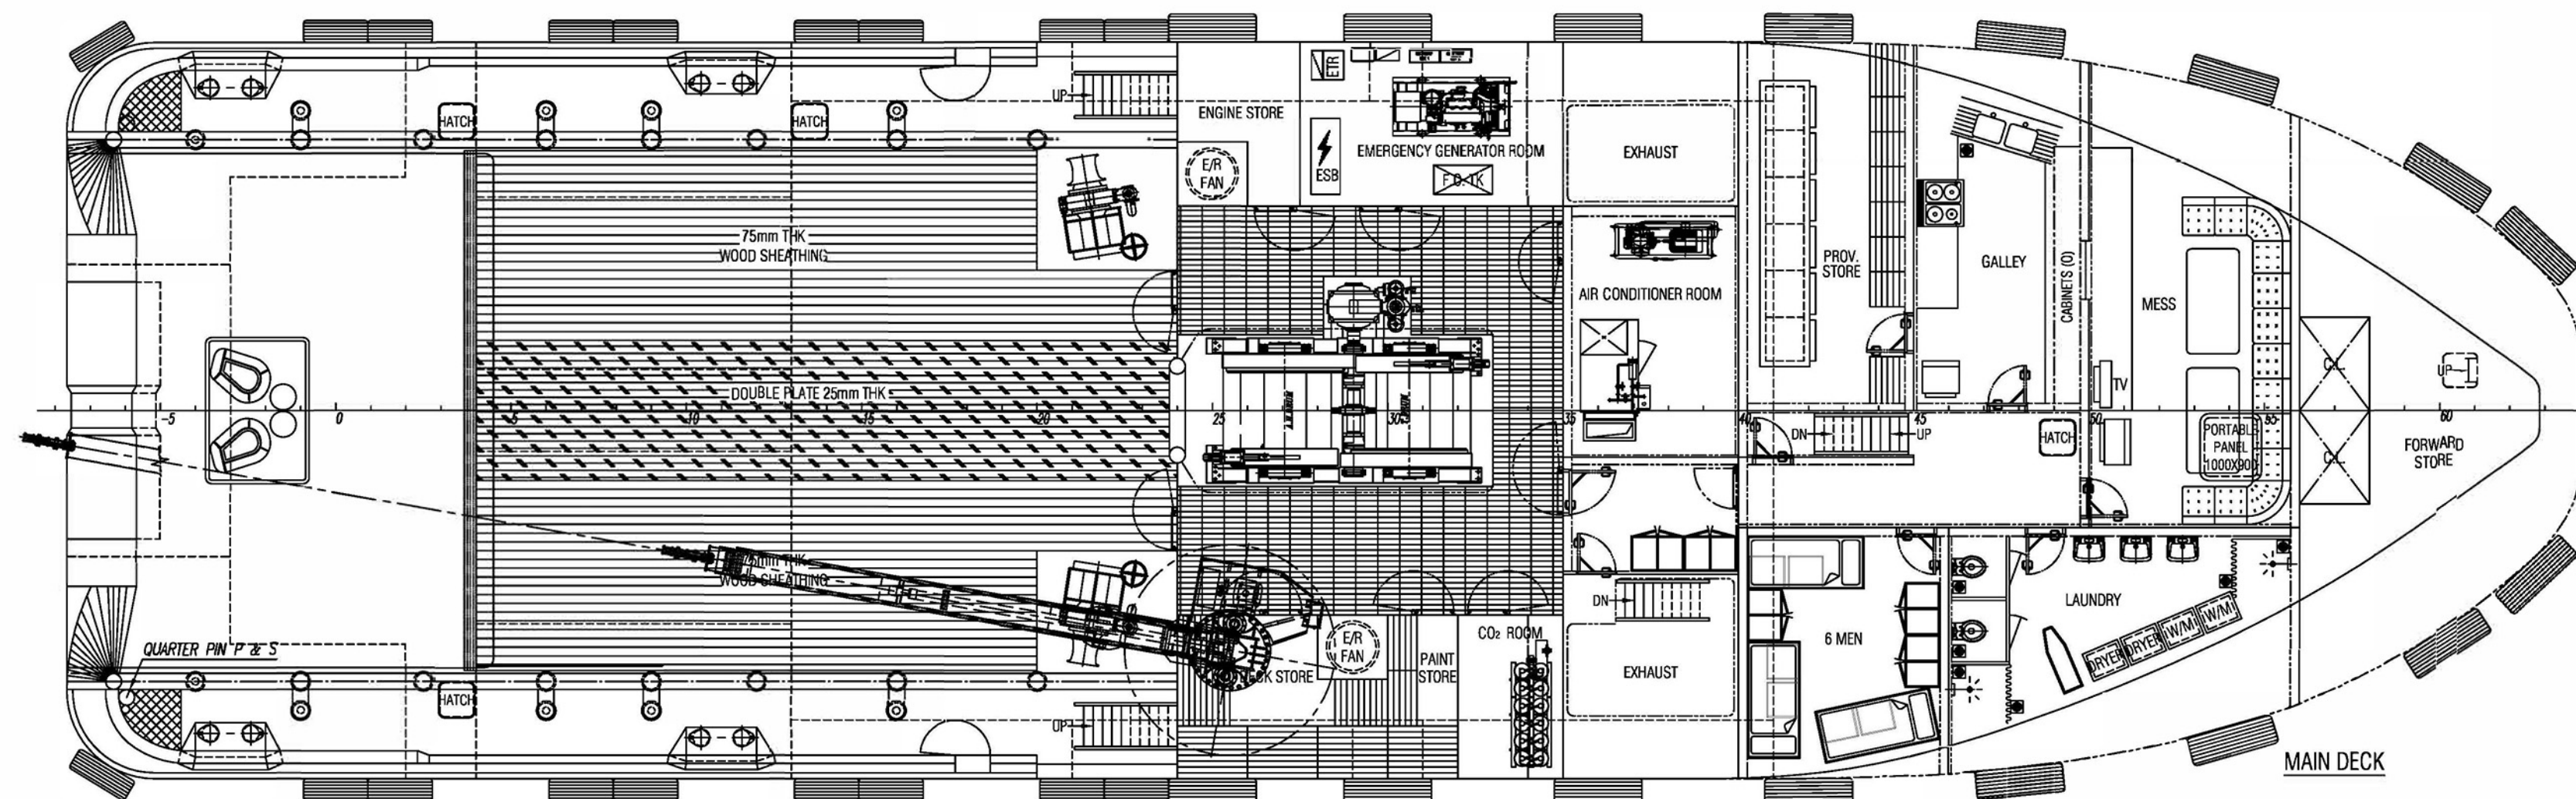

ORIENT NO. 7
